

ADDENDUM NO. 1


RFP # 2021-01

Please note the following clarification regarding the Fire Station Pole Barn for the Fire Department (RFP# 2021-01):

1.) Bids to provide cost for **Additive Alternate 1:**

Site preparation and construction of a 60' x 30' x 12' concrete slab floor for the pole barn according to the following Specifications:

- 12" compacted subgrade, min. L.B.R. 40, compacted to 100% of maximum dry density as established by ASTM T-99;
- 6" limerock base, min. L.B.R. 100;
- 6" of 4,000 PSI fiber reinforced (or equivalent) concrete;
- 1/8" to 1/4" contraction joints shall be provided every 10 ft

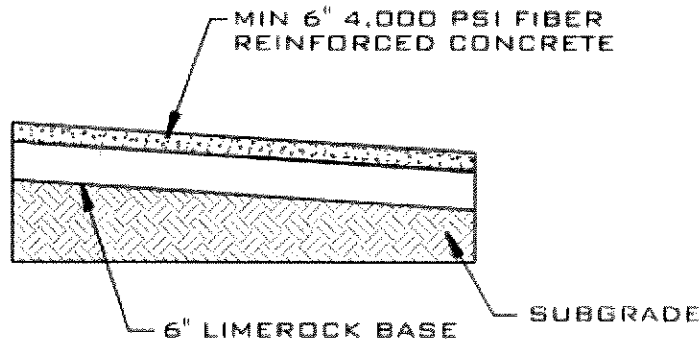

2.) Revised **Bid Date:** Bid date will be moved back one week to February 8th at 2:00 p.m. CST.

3.) Revised **Bid Form (attached)**

Addendum Accepted By: _____
Signature of Bidder

Date: _____

Print Name of Bidder: _____

Name of Company: _____

**BID FORM
FIRE STATION POLE BARN FOR FIRE DEPARTMENT**

Bidder Information				
Name of Bidder:				
Address of Bidder:				
Contact Person			Phone Number:	
Proposal Lump Sum Total Cost				
Base Bid - Pole Barn Construction (Lump Sum)*				\$
Additive Alternate 1 – Concrete Slab (Lump Sum)				\$
Description of Experience and Technical Understanding of Project (list projects of similar size/cost)				
References (list up to three)				
Name:	Phone:	Project:	Location of Project:	When work was performed:
Name:	Phone:	Project:	Location of Project:	When work was performed:
Name:	Phone:	Project:	Location of Project:	When work was performed:

***Note: Bid costs compared during post-bid ranking by the City will be based on the Base Bid lump sum cost**

Bidder has attended a mandatory pre-bid site visit (scheduled directly with the City)? Yes No

Bidder certifies that as Prime Contractor, will perform a minimum of 50% of the work on project and will subcontract less than 50% of the total project? Yes No

If intent to subcontract work, list name(s) of all subcontractors to perform work on project:

Bidder's Signature: _____

_____ Date

Printed Name & Title: _____