

**ADDENDUM NO. 1**


**RFP # 2021-01**

Please note the following clarification regarding the Fire Station Pole Barn for the Fire Department (RFP# 2021-01):

1.) Bids to costs for **Additive Alternate 1:**

Site preparation and construction of a 60' x 30' x 12' concrete slab floor for the pole barn according to the following **Specifications:**

- 12" compacted subgrade, min. L.B.R. 40, compacted to 100% of maximum dry density as established by ASTM T-99;
- 6" limerock base, min. L.B.R. 100;
- 6" of 4,000 PSI fiber reinforced (or equivalent) concrete;
- 1/8" to 1/4" contraction joints shall be provided every 10 ft

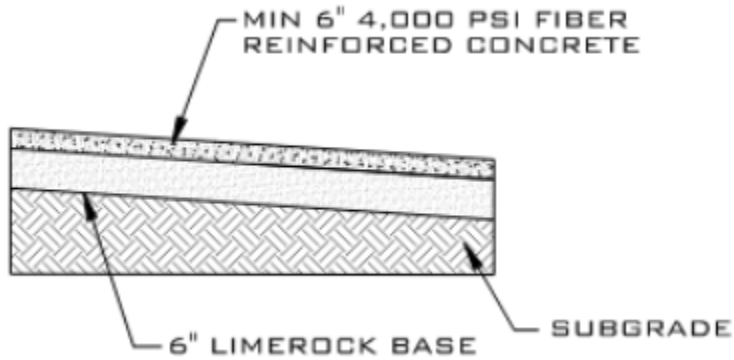

2.) Revised **Bid Form (attached)**

Addendum Accepted By: \_\_\_\_\_  
Signature of Bidder

Date: \_\_\_\_\_

Print Name of Bidder: \_\_\_\_\_

Name of Company: \_\_\_\_\_

**BID FORM  
FIRE STATION POLE BARN FOR FIRE DEPARTMENT**

Bidder Information				
Name of Bidder:				
Address of Bidder:				
Contact Person			Phone Number:	
Proposal Lump Sum Total Cost				
<b>Base Bid - Pole Barn Construction (Lump Sum)*</b>				<b>\$</b>
<b>Additive Alternate 1 – Concrete Slab (Lump Sum)</b>				<b>\$</b>
Description of Experience and Technical Understanding of Project (list projects of similar size/cost)				
References (list up to three)				
Name:	Phone:	Project:	Location of Project:	When work was performed:
Name:	Phone:	Project:	Location of Project:	When work was performed:
Name:	Phone:	Project:	Location of Project:	When work was performed:

**\*Note: Bid costs compared during post-bid ranking by the City will be based on the Base Bid lump sum cost**

Bidder has attended a mandatory pre-bid site visit (scheduled directly with the City)?    Yes       No

Bidder certifies that as Prime Contractor, will perform a minimum of 50% of the work on project and will subcontract less than 50% of the total project?    Yes       No

If intent to subcontract work, list name(s) of all subcontractors to perform work on project:

Bidder's Signature: \_\_\_\_\_

\_\_\_\_\_ Date

Printed Name & Title: \_\_\_\_\_